

VST – Track

Intelligent PTZ Camera

- New intelligent PTZ camera technology
- Auto tracking of moving objects
- Configurable default position or tour
- Scheduled modes of operation
- Areas of non-significant motion masked out
- Manual override PTZ control
- Automatic close-up pictures
- Standalone operation or Integrated operation with FlexWATCH viewing/recording station



VST-TRACK

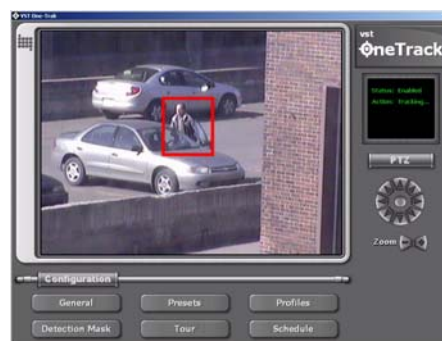
With the VST-Track smart camera system, a moving object or a person can be tracked automatically and recorded, without any manual operation or any operator intervention.

Upon detection of motion in the image, the PTZ camera is positioned on the detected object or subject and tracks it automatically, occasionally zooming in to catch close-up shots.

In a context of standalone (no operator) recording, video sequences recorded in intelligent tracking mode have much more chances to capture significant events with enough details to enable identification. In most cases, a static camera or a PTZ camera in scan mode will not have the zoom level to enable useful identification.

With the VST-Track system, full capabilities of PTZ cameras are exploited without the need of an operator.

The VST-Track system works as a standalone system or integrated with a FlexWATCH Manager viewing/recording station.



Applications

- High security buildings
- Perimeter security
- Private and public parking
- Maritimeports, trains stations
- Bridges
- Public parks, monuments
- Car dealerships
- Government, defense
- Municipal Garages
- Construction sites
- Unattended utilities installations
- Factories, refineries, pipelines







E-ZCOM inc.

info@ezcom.ca www.e-zcom.ca
(514) 591-1110 Sans frais: 1-866-666-1110
47, des Amadouviens, Ste-Thérèse, QC, J7E 5S7, Canada

VST – Track

Intelligent PTZ Camera System

Spécifications			
Model	VST-OneTrack/HW	VST-OneTrack/HWFW	VST-OneTrack/HWDVR
CPU/RAM/HD	Celeron 2.4/ 256 MB /80 GB	P4 2.8/ 512MB/ 200GB	P4 2.8/ 512MB/ 200GB
Tracking Software			
PTZ Camera	Model	Honeywell CCTV HSDN-251	
	Lens	Zoom 25x optical with auto-focus, 8 x digital	
	PAN/TILT Speed	Pan: 360°/sec, Tilt : 90°/sec	
	Sensitivity	Day: .1 lux, Night:.01 lux	
	Housing	Outdoor housing with heater and blower	
Remote access	Transfer of record files	Remote « live » display with FlexWATCH 3400	Remote live and playback display
Recording	Manual mode, continuous or with external recorder	Manual, continuous, event, motion detection	n-EYE DVR integrated, up to 15 fixed cameras
Display/playback	Local display of live or recording	Live or playback, local or remote	Live or « playback », local or remote
Interconnection configuration			



E-ZCOM inc.

info@ezcom.ca www.e-zcom.ca

(514) 591-1110 Sans frais: 1-866-666-1110

47, des Amadouviens, Ste-Thérèse, QC, J7E 5S7, Canada.